

# INSTRUCTIONS

## Tunnel Light

### Tools Required


Electric drill  
1/4" drill bit  
7/8" drill bit

1/2 NPT tap w/handle  
5/16-18" Tap

### Parts

Light assemblies (2)  
Cover lens (2)  
Stainless steel bolts (4) 5/16-18 x 5-1/2"

1. Locate predrilled assembly points
2. Carefully locate the three (3) holes on the pole.  
**WARNING:** Lights are to be mounted 90 degrees away from cleats or M-winch.
3. Field mount and wire lights.

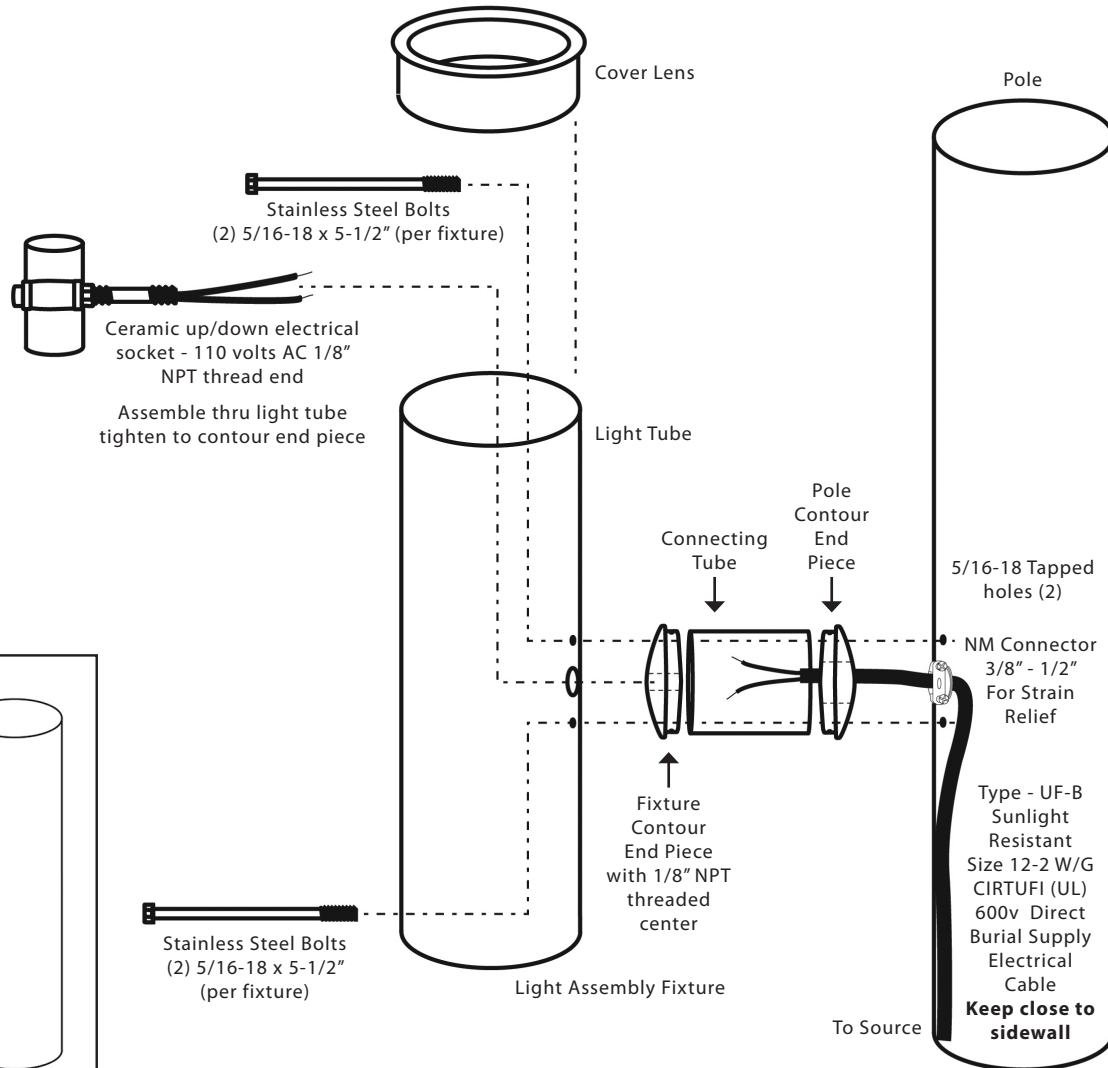

### PRODUCT NOTES:

- Light Assembly fixture: 6063-T6 aluminum with Satin-brushed finish. Cylinder is 18 inches high by 6 inches in diameter.
- Electrical Socket: Ceramic up/down electrical socket - 110 volts AC.
- Lens Cap: Aluminum housing with tempered glass lens.
- Pole Mounting Tube: 6063-T6 aluminum with Satin-brushed finish.
- Electrical Socket Wires: (2) 14 AVG type B.
- Mounting Hardware: Stainless steel hex bolts 5/16-18 x 5-1/2" (2) per fixture.
- Lamp: 110 volt 150 watt outdoor flood lamp, assembly accommodates two (2) lamps.



**Wiring must conform to all National and Local electrical codes**

**\*\*\*All electrical wiring must be protected by GFCI - Ground Fault Interrupters**